



EAN code  
 PRI-51 /0.5A: 8595188142885  
 PRI-51 /1A: 8595188124904  
 PRI-51 /2A: 8595188124911  
 PRI-51 /5A: 8595188124928  
 PRI-51 /8A: 8595188124935  
 PRI-51 /16A: 8595188124942

**Technical parameters** **PRI-51**

Supply circuit	
Supply terminals:	A1 - A2
Voltage range:	AC 24 - 240 V and DC 24 V (AC 50 - 60 Hz)
Burden:	max. 1.5 VA
Supply voltage tolerance:	-15 %; +10 %

Measuring circuit													
Load:	between B1 - B2												
Current range:	<table border="1"> <tr> <td>PRI-51/0.5</td> <td>PRI-51/1</td> <td>PRI-51/2</td> <td>PRI-51/5</td> <td>PRI-51/8</td> <td>PRI-51/16</td> </tr> <tr> <td>AC0.05-0.5A (AC 50Hz)</td> <td>AC0.1-1A (AC 50Hz)</td> <td>AC0.2-2A (AC 50Hz)</td> <td>AC0.5-5A (AC 50Hz)</td> <td>AC0.8-8A (AC 50Hz)</td> <td>AC1.6-16A (AC 50Hz)</td> </tr> </table> <p style="text-align: center;">↑ applicable also for current transformer</p>	PRI-51/0.5	PRI-51/1	PRI-51/2	PRI-51/5	PRI-51/8	PRI-51/16	AC0.05-0.5A (AC 50Hz)	AC0.1-1A (AC 50Hz)	AC0.2-2A (AC 50Hz)	AC0.5-5A (AC 50Hz)	AC0.8-8A (AC 50Hz)	AC1.6-16A (AC 50Hz)
PRI-51/0.5	PRI-51/1	PRI-51/2	PRI-51/5	PRI-51/8	PRI-51/16								
AC0.05-0.5A (AC 50Hz)	AC0.1-1A (AC 50Hz)	AC0.2-2A (AC 50Hz)	AC0.5-5A (AC 50Hz)	AC0.8-8A (AC 50Hz)	AC1.6-16A (AC 50Hz)								
Max. permanent current:	2 A   4 A   8 A   17 A												
Inrush overload <1ms:	100 A												
Current adjustment:	potentiometer												
Time delay:	adjustable 0.5 - 10 s												


Accuracy	
Setting accuracy (mechanical):	5 %
Repeat accuracy:	< 1 %
Temperature dependency:	< 0.1 % / °C (°F)
Limit values tolerance:	5 % (10 % for 0.05 - 0.5 A range)
Hysteresis (fault to OK):	5 %

Output	
Number of contacts:	1x changeover / SPDT (AgNi / Silver Alloy)
Current rating:	8 A / AC1
Breaking capacity:	2000 VA / AC1, 240 W / DC
Output indication:	green / red LED


Other information	
Operating temperature:	-20 °C to 55 °C (-4 °F to 131 °F)
Storage temperature:	-30 °C to 70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (supply - output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel / IP10 terminals
Oversvoltage category:	III.
Pollution degree:	2
Max. cable size (mm <sup>2</sup> ):	solid wire max. 2x 2.5 or 1x 4, with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:	72 g (2.54 oz.)
Standards:	EN 60255-6, EN 61010-1

- It serves for monitoring of heating in rail-switches, heating cables, consumption of one-phase motors, indicates current flow
- Flexible adjustment by potentiometer, choice of 6 ranges: AC 0.05 - 0.5A; AC 0.1 - 1A; AC 0.2 - 2A; AC 0.5 - 5A; AC 0.8 - 8A; AC 1.6 - 16A
- Adjustable delay 0.5 - 10 s to eliminate short current peaks
- It is possible to use for current scanning from current transformer - up to 600 A!
- Universal supply AC 24 - 240 V and DC 24 V
- Supply is galvanically separated from measured current, it must be in the same phase
- Output contact: 1x changeover / SPDT 8 A
- 1-phase, 1-MODULE, DIN rail mounting

**Description**

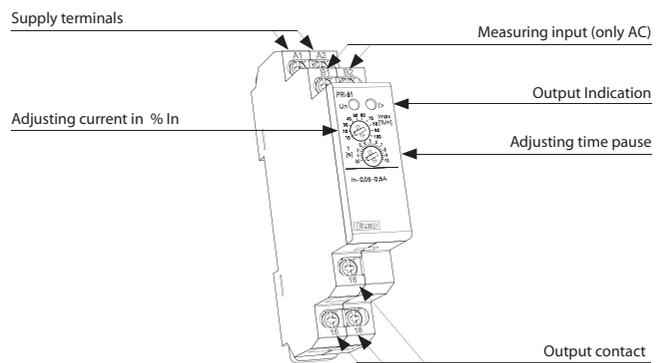


**Function**

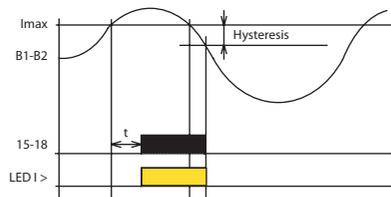


Monitoring relay PRI-51 serves to monitor current level in one-phase AC circuits. Gradual setting of actuating current of monitoring relay enables many different applications. Output relay is in normal state opened. After the set current level is reached, relay closes after the set delay (0.5 - 10s). When returning from faulty to normal state there is a hysteresis (5 %). Multi-voltage of this relay is an advantage. It is possible to monitor load which doesn't have the same supply as monitoring relay PRI-51. Range of PRI-51 can be increased by an external current transformer.

**Connection**

**Example Connection:**  
 PRI-51 with current transformer for current range increase.

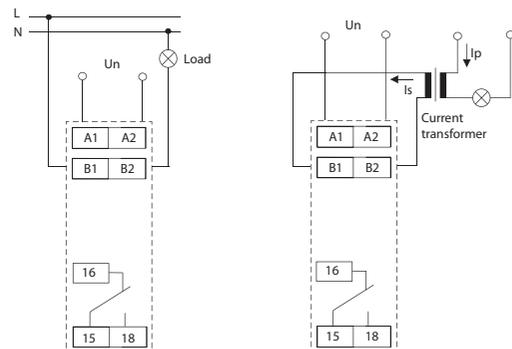

**Symbol** **Example of an order**



Always specify all reference name of current relay according to required range, for example PRI-51/5.