



2350 G3 D2 PW19 40/30/ML-8MC ET

LED surface-mounted luminaire

TOC: 7755640

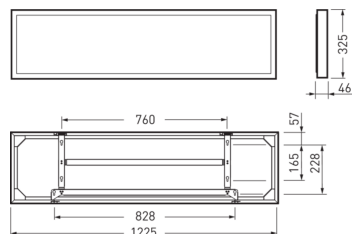

Product description

Luminaire type

Surface-mounted LED ceiling luminaire with translucent PMMA cover.

Applications

Offices, Corridors, Foyers, Conference rooms, Retail areas, waiting zones, Education, Care homes.

Mounting methods

For ceiling mounting indoors.

Optical system

Cover of translucent PMMA with photometrically effective prism structure. With symmetric narrow-wide light distribution. Glare evaluation according to UGR rating (EN 12464-1) < 19.

LED system

Luminaire luminous flux adjustable in 2 steps. Luminaire luminous flux 4000 lm - 3000 lm, connected load 36,00 W - 30,00 W, Power Factor $\lambda > 0,95$, luminous efficiency of luminaire 111 lm/W - 100 lm/W. Light colour warm white or neutral white, correlated colour temperature (CCT) 2-stage adjustable (3000 K / 4000 K), general colour rendering index (CRI) $R_a > 80$. Mean rated service life L65(t_q 25 °C) = 50,000 h.

Luminaire body

Luminaire body of aluminium. Surface coated white (RAL 9016). Dimensions (L x W): 1225 mm x 325 mm, luminaire height 46 mm. Safety class (EN 61140): I, protection rating (DIN EN 60529): IP20, impact resistance level in accordance with IEC 62262: IK02, testing temperature of wire glow test in accordance with IEC 60695-2-11: 650 °C. Weight: 3,4 kg.

Electrical version

With electronic transformer, switchable. The control gear unit is replaceable in accordance with the ecodesign requirements (VO (EU) 2019/2020). The luminaire complies with the fundamental requirements of applicable EU regulations and product safety legislation and bears the CE symbol. The luminaire is also ENEC-certified by an independent testing authority.

Disassembly instructions (PDF) for the product available at: <https://www.trilux.com/EcoDesign>

Product features and key data

Applications	offices banks foyers sales rooms ticket halls exhibition rooms educational rooms	
Luminaire type	Surface-mounted LED ceiling luminaire with translucent PMMA cover.	
Mounting method	Surface-mounting	
Luminaire optic	Cover of translucent PMMA with photometrically effective prism structure.	
LED-System	Luminous flux (level 0)	Luminous flux (level F)
Connected load	36 W	30 W
Power factor	0,95	
Colour temperature	4.000 K	4.000 K
Rated luminous flux	4.000 lm	3.000 lm
Luminous efficacy	111 lm/W	100 lm/W
Interchangeability lightsource	No - Electrical safety	
Service life	L65 (25 °C) = 50.000 h	

Product features and key data

Colour rendering index	80
Colour tolerance	5 SDCM
Photobiological class	Group 0 - no risk
Luminaire colour	RAL9016 Traffic white
Luminaire body	Luminaire body of aluminium.
Electrical version	With electronic transformer, switchable.
Wire diameter	1,50 mm ²
Connection method	Plug-in terminal
Mains frequency	50/60 Hz
Mains voltage	220 - 240 V
Total harmonic distortion < %	15,60 %
Ingress Protection (IP) rating	IP20
Protection class	I
Impact resistance (IK)	IK02
Hot wire resistance	650 °C
Ambient temperature	25 °C
Max. Luminaires B10	14
Max. Luminaires B16	23
Max. Luminaires C10	24
Max. Luminaires C16	39
Net length	1.225 mm
Net width	325 mm
Net height	46 mm
Weight	3,4 kg

For more sustainability in day-to-day business

New
packing



CO₂ OPTIMISED



NO PLASTIC



ONLY ONE MATERIAL



100% RECYCLABLE



www.trilux-twenty3.com/eco