



# MASTER LEDtube GA

MASTER LEDtube GA110 1500mm 24W 840 I ROT

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. This product is the ideal solution for up lighting in general lighting applications.

## Product data

### • General Characteristics

Cap-Base	G13 ROT
Life to 70% lumen maintenance	40000 hr
Average Life At Ambient 25°C	40000 hr

### • Light Technical Characteristics

Color Code	840
Correlated Color Temperature	4000 K
Luminous Flux	2065 Lm
Color rendering index	83

### • Electrical Characteristics

Wattage	24 W
Voltage	100-240 V
Power Factor	0.9 (min) -

### • Temperature Characteristics

Operating temperature	-30 (min), 45 (max) C
T-Storage	-40 (min), 65 (max) C

### • Product Dimensions

Length A1	1514.2 mm
Fixing Hole Distance	1507.1 mm
A2 Length	

Length A3	1514.2 mm
Mounting hole diameter	25.68 mm
Circular outline dimension	28 mm

### • Approval & Application Chars


VDE marking	No
CE marking	Yes
UL certificate	No
RoHS compliance	Yes
KEMA Keur certificate	Yes

### • Product Data

Order code	929000298802
Full product code	929000298802
Full product name	MASTER LEDtube GA110 1500mm 24W 840 I ROT
Order product name	MST LEDtube GA110 1500mm 24W 840 I ROT
Pieces per pack	1
Packing configuration	10
Packs per outerbox	10
Bar code on pack - EAN1	8718291662372
Bar code on outerbox - EAN3	8718291662389
Logistic code(s) - 12NC	929000298802
Net weight per piece	0.450 kg



## Dimensional drawing

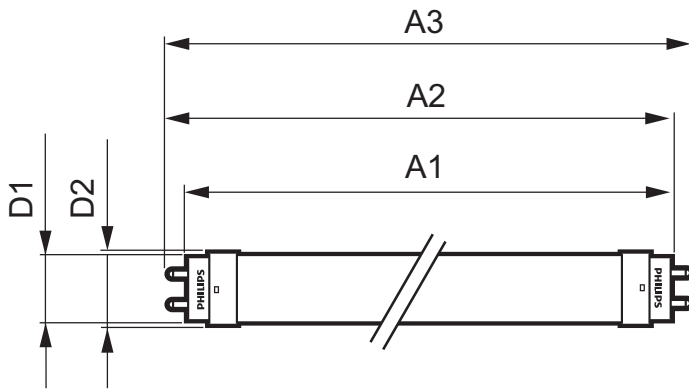

### MASTER LEDtube GA110 1500mm 24W 840 I ROT

Product	A1 (Norm)	A2 (Norm)	A3 (Norm)	D1 (Norm)	D2 (Norm)
LEDtube GA110 1500mm 24W 840 I ROT	1514.2	1507.1	1514.2	25.68	28



© 2013 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2013, February 9  
data subject to change