

General info

Outdoor - Recessed


Outdoor ground recessed projector with integrated LED sources and direct light emission



Ean	8021696255682
Item	FLOOR PT D14
Installation	Recessed (Floor)
Guarantee	5 years
Gross weight	1.08 kg
Volume	0.004874 m ³

Technical info

Net weight	0.96 kg
Insulation class	I
Protection index	IP67
Operating temperature	-15° ~ +45 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included NO, electronic
Recessed specifications	Ø 137 - h. ≥ 110 , N/A
Load resistance	IK10

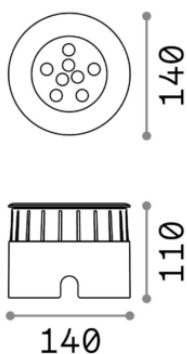

Source info

Integrated source	Integrated LED module
Replaceable source	-
Power	LED 12W
Emission	Direct
Max consumption	max 12,00 W
Features LED	LED SMD OSRAM
CCT	3000 K
Duration LED (t. 25°C)	25000 h
CRI	> 80
Light beam	30°
Light beam flux	1340 lm
Useful light flux	1000 lm
Standby power	< 0.50