

## General info


### Technical - Linear system

Indoor suspended linear fitting with integrated LED sources and direct light emission

<b>Ean</b>	8021696271217
<b>Item</b>	OFFICE SP 4000K WH
<b>Installation</b>	Suspension
<b>Guarantee</b>	5 years
<b>Gross weight</b>	1.86 kg
<b>Volume</b>	0.004128 m <sup>3</sup>

## Technical info

<b>Net weight</b>	1.82 kg
<b>Insulation class</b>	I
<b>Protection index</b>	IP20
<b>Compliance</b>	CE
<b>Operating temperature</b>	0° ~ +40 °C
<b>Dimmer</b>	Non-dimmable, On-Off
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic
<b>Load resistance</b>	IK06

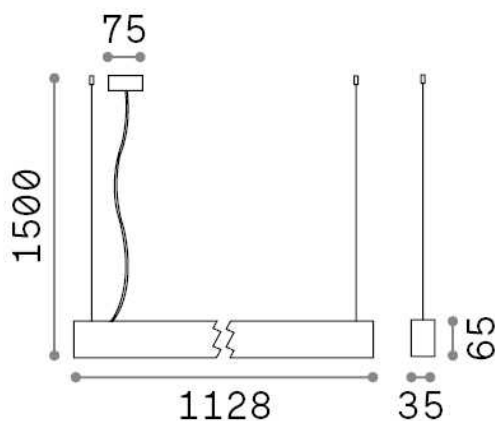

## Source info

<b>Integrated source</b>	Integrated LED module
<b>Replaceable source</b>	Replaceable (by qualified operators only)
<b>Power</b>	30 W
<b>Emission</b>	Direct
<b>Max consumption</b>	max 30 W
<b>Features LED</b>	LED SMD
<b>CCT</b>	4000 K
<b>Duration LED (t. 25°C)</b>	50000 h
<b>CRI</b>	> 80
<b>SDCM</b>	-
<b>Light beam</b>	37°
<b>UGR Maximum</b>	< 16
<b>Light beam flux</b>	3100 lm
<b>Useful light flux</b>	2940 lm
<b>Standby power</b>	< 0.50 W