

General info

Outdoor - Recessed


Outdoor ground recessed adjustable projector with integrated LED sources and direct light emission



Ean	8021696277011
Item	TAURUS PT 10W
Installation	Recessed (Floor)
Guarantee	5 years
Gross weight	2.53 kg
Volume	-

Technical info

Net weight	1.98 kg
Insulation class	I
Protection index	IP67
Compliance	CE
Operating temperature	-15° ~ +45 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic
Recessed specifications	190 x 190 - h. ≥ 125 , -
Load resistance	IK09
Adjustability	vert. +/-30°

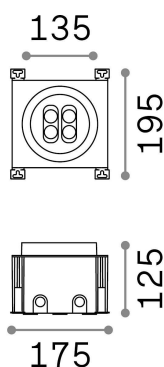

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 10 W
Emission	Direct
Max consumption	max 10 W
Features LED	LED SMD OSRAM
CCT	3000 K
Duration LED (t. 25°c)	50000 h
CRI	> 80
Light beam	30°
Light beam flux	860 lm
Useful light flux	640 lm
Standby power	< 0.50 W