

## General info

## Outdoor - Recessed


Outdoor ground recessed adjustable projector with integrated LED sources and direct light emission



|              |                  |
|--------------|------------------|
| Ean          | 8021696277028    |
| Item         | TAURUS PT 13W    |
| Installation | Recessed (Floor) |
| Guarantee    | 5 years          |
| Gross weight | 4.4 kg           |
| Volume       | -                |

## Technical info

|                         |  |
|-------------------------|--|
| Net weight              | 3.25 kg  |
| Insulation class        | I  |
| Protection index        | IP67   |
| Compliance              | CE   |
| Operating temperature   | -15° ~ +45 °C  |
| Dimmer                  | Non-dimmable, On-Off   |
| Power output            | 220-240 V AC 50/60 Hz  |
| Power supply            | In-built, included<br>Replaceable (by qualified operators only),<br>electronic |
| Recessed specifications | 270 x 270 - h. ≥ 125 , -   |
| Load resistance         | IK10   |
| Adjustability           | vert. +/-30°   |

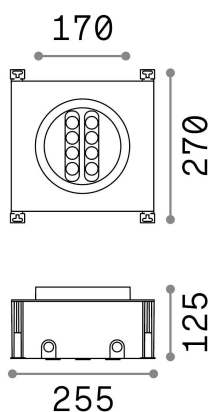

## Source info

|                        |   |
|------------------------|---|
| Integrated source      | Integrated LED module                     |
| Replaceable source     | Replaceable (by qualified operators only) |
| Power                  | LED 13,5 W                                |
| Emission               | Direct                                    |
| Max consumption        | max 13,5 W                                |
| Features LED           | LED SMD OSRAM                             |
| CCT                    | 3000 K                                    |
| Duration LED (t. 25°C) | 50000 h                                   |
| CRI                    | > 80                                      |
| Light beam             | 30°                                       |
| Light beam flux        | 1300 lm                                   |
| Useful light flux      | 940 lm                                    |
| Standby power          | < 0.50 W                                  |