


## General info

### Outdoor - Recessed

Outdoor ground recessed adjustable projector with integrated LED sources and direct light emission

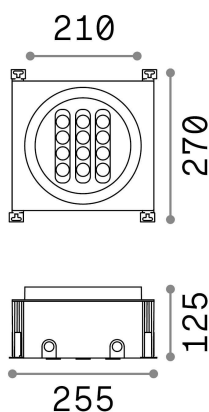

## Technical info

<b>Net weight</b>	3.5 kg
<b>Insulation class</b>	I
<b>Protection index</b>	IP67
<b>Compliance</b>	CE
<b>Operating temperature</b>	-15° ~ +45 °C
<b>Dimmer</b>	Non-dimmable, On-Off
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic
<b>Recessed specifications</b>	270 x 270 - h. ≥ 125 , -
<b>Load resistance</b>	IK10
<b>Adjustability</b>	vert. +/-30°

## Source info

<b>Integrated source</b>	Integrated LED module
<b>Replaceable source</b>	Replaceable (by qualified operators only)
<b>Power</b>	LED 20 W
<b>Emission</b>	Direct
<b>Max consumption</b>	max 20 W
<b>Features LED</b>	LED SMD OSRAM
<b>CCT</b>	3000 K
<b>Duration LED (t. 25°C)</b>	50000 h
<b>CRI</b>	> 80
<b>Light beam</b>	30°
<b>Light beam flux</b>	1950 lm
<b>Useful light flux</b>	1460 lm
<b>Standby power</b>	< 0.50 W