



Softone

Softone 11W WW E27 220-240V 1PF

Extremely compact covered energy-saving lamp that produces soft white light

Product data

• General Characteristics

Cap-Base	ES [ES]
Bulb	A55 [A 55mm]
Nominal Lifetime	10000 hr
Rated Lifetime	10000 hr
Rated Lifetime (years)	10 an

• Light Technical Characteristics

Colour Code	827 [CCT of 2700K]
Colour Rendering Index	81 (min), 82 (nom) Ra8
Colour Designation	Warm white
Colour Temperature	2700 K
Colour Temperature Technical	2700 K
Lamp Luminous Flux	580 Lm
Rated Luminous Flux	580 Lm
Lamp Luminous Efficacy	48 Lm/W
Lumen Maintenance 2000h	83 %
Lumen Maintenance 6000h	70 %
LLMF - end nominal lifetime	65 %
Chromaticity Coordinate X	463 -
Chromaticity Coordinate Y	420 -

• Electrical Characteristics

Rated Wattage	11.0 W
Lamp Wattage	11 W
Power Factor	0.6 -

Voltage	220-240 V
Lamp Current mA	80 mA
Line Frequency	50/60 Hz
Dimmable	no
Wattage Equivalent	50 W
Starting Time	1.0 s
Warm-up Time to 60% Light Outp	10 (min), 100 (max) s

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.5 (nom), 2.0 (max) mg
Energy consumption kWh/1000h	11 kWh

• Measuring Conditions

Switching cycle	30000X
-----------------	--------

• Product Dimensions

Overall Length C	109.0 (max) mm
Diameter D	56.0 (max) mm
Width F	45.5 (max) mm

• Product Data

Order code	682066 00
Full product code	871829168206600
Full product name	Softone 11W WW E27 220-240V 1PF
Order product name	Softone 11W WW E27 220-240V 1PF/6
Pieces per pack	1

Packing configuration 6
 Packs per outerbox 6
 Bar code on pack - EAN1 8718291682066
 Bar code on outerbox - EAN3 8718291682073

Logistic code(s) - 929689118507
 12NC
 Net weight per piece 0.068 kg


Warnings and Safety

- Breaking a lamp is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a closed plastic

bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

- Compact fluorescent lamps have to be treated as special waste, they must be taken to your local waste facilities for recycling. The European Lighting Industry has set up an infrastructure, capable of recycling mercury, other metals, glass etc.

Dimensional drawing

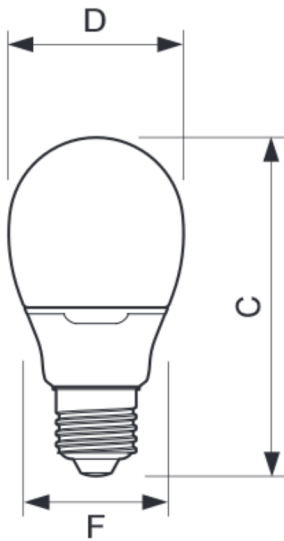

E27

Softone 11W WW E27 220-240V 1PF

Product	C (Max)	D (Max)	F (Max)
Ambiance 11W WW E27 220-240V 50/60Hz	109.0	56.0	45.5